


REVISIONS			
REV.	DESCRIPTION	DATE	REVISED BY

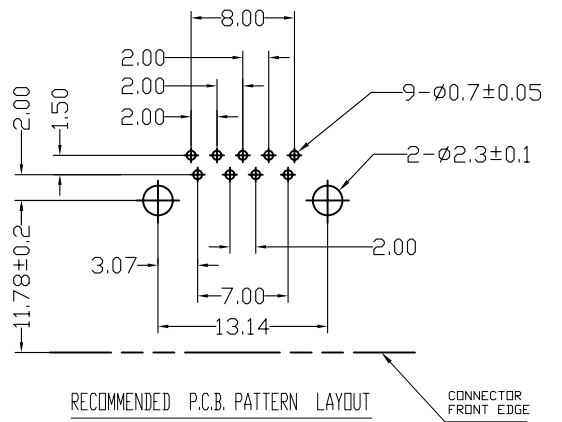

NOTE:  
 1.ELECTRIC:  
 a.CONTACT RESISTANCE: 30 MILLIOHMS MAX  
 b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN  
 c.DIELECTNIC VOLTAGE: 1.8A AT 250V AC MIN  
 d.OPERATING TEMPERATURE: -55°C- 85°C  
 2.INSERTION FORCE:35N Max  
 EXTRACTION FORCE:10N MIN INITAL AND 8N MIN AFTER THE SPECIFIED  
 3.\*STRESS REPRESENTATIVE SIZE

HOW TO ORDER:  
 USB3-A00800XPXXXX

- 01:TERMINAL PLATING Au:1U"
- 03:TERMINAL PLATING Au:3U"
- 05:TERMINAL PLATING Au:5U"
- 15:TERMINAL PLATING Au:15U"
- 30:TERMINAL PLATING Au:30U"
- A:Shell PLATING Au:G/F
- N:Shell PLATING Ni 80U"
- F:Shell Fe
- C:Shell Cu
- B:PBT BLUE
- W:PBT WHITE
- H:PBT BLACK

4	HOUSING	PBT	UL94V-0
3	SHELL	SPCC or Brass	OVEP-PLATING: Ni Or Au
2	5P TERMINAL	Brass T=0.2mm	OVEP-PLATING: Au Ni/Sn
1	4P TERMINAL	Phosphor Bronze T=0.2mm	OVEP-PLATING: Au Ni/Sn
ITEM	DESCRIPTION	MATERIAL	REMARKS

**EBE**  
 EBE TECHNOLOGY(HK) LIMITED

GENERAL TOLERANCE		Description	USB3.0 A母 插板式 90度		Third Angle Projection	
X. ±0.20	X° ±2°	Customer Name	Drawing By	王超		
X.X ±0.15	X.X° ±1°	Customer No.	Designed By			
X.XX ±0.13	X.XX° ±0.5°	Produce No.	Approved By	许代略		Units <input type="checkbox"/> MM <input type="checkbox"/> Inch
Date		2011.12.20	Scale	1:1		