
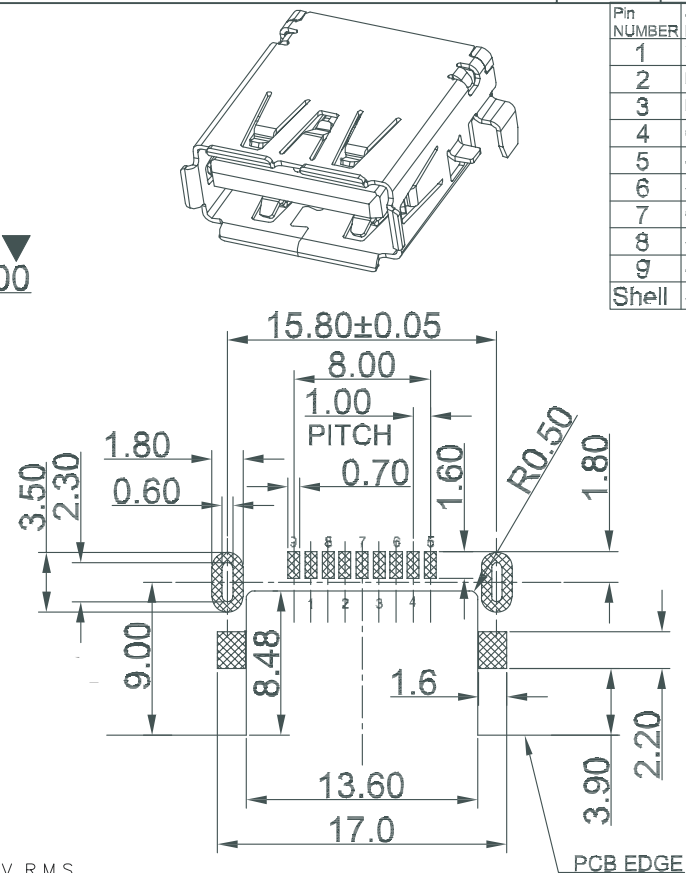
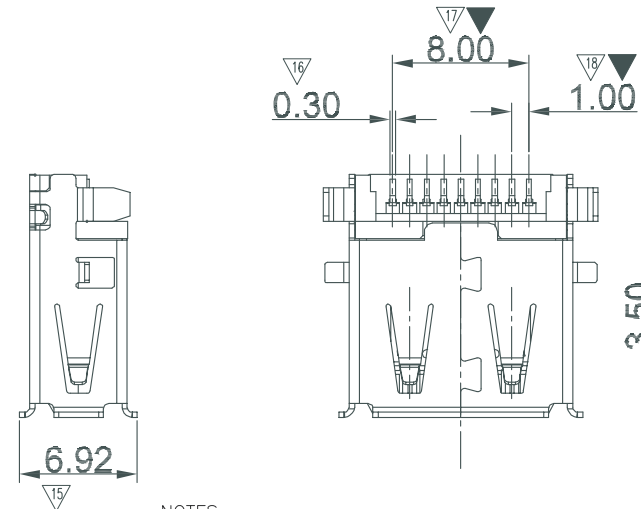


REVISIONS			
REV.	DESCRIPTION	DATE	REVISED BY

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	SIdA_SSR
6	SIdA_SSR
7	GND_DRA
8	SIdA_SSTλ
9	SIdA_SSTλ
Shell	Shield

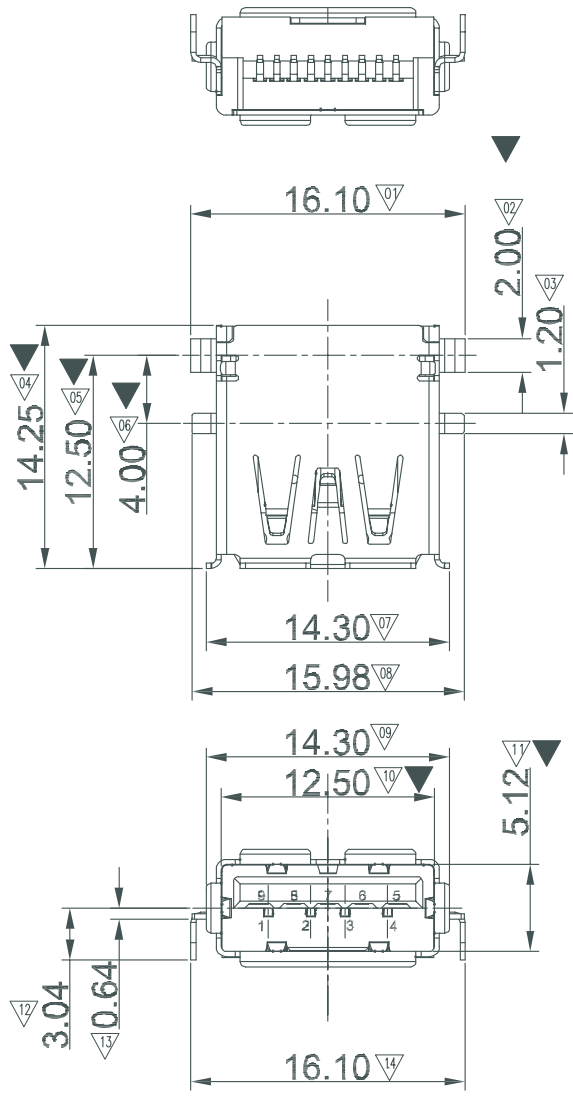

- NOTES:
- MATERIAL:
 - HOUSING: PA66
 - CONTACT: BRONZE(T=0.20mm)
 - SHELL: BRASS(T=0.30mm)
 - ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ MAXIMUM
 - CONTACT CURRENT RATING: 1.5A
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
 - INSULATION RESISTANCE 1000 MEGOHMS MIN.
 - OPERATING TEMPERATURE: -40°C~85°C
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 3.57kg MAX.
 - UNMATED FORCE: 1.02kg MIN.
 - DURABILITY: MANDATORY: 5000 CYCLES
 - PLATING
 - TERMINAL: GOLD FLASH ALL OVER 50U" MIN. NICKEL AND 1U" MIN. TIN ALL OVER 50U" MIN NICKEL ON SOLDER AREA.
 - SHELL: 150U" MIN NICKEL PLATING OVERALL.

EBE
EBE TECHNOLOGY (HK) LIMITED

GENERAL TOLERANCE		Description	USB3.0 AF SMT		Third Angle Projection	
X. ±0.20	X° ±2°	Customer Name	Drawing No.	资巧云		
X.X ±0.15	X.X° ±1°	Customer No.	Designed By	杨永成		
X.XX ±0.13	X.XX° ±0.5°	Produce No.	Approved By	李建清		
		Date	Scale	10.01.15		

Units

MM
 Inch

REV
A/0